


IV Pole Uni Düsseldorf

Material: stainless steel

I-D02124

PRODUCT DESCRIPTION

Field of application	Intensive Care
Material	Stainless steel
Bottle Holder	Stainless steel to screw in, bottle holder
Number of hooks	4
Arrangement of the hooks	90° to each other
Type of height adjustment	Stainless steel screw height adjustment
Maximum length/height	2,550
Minimum length/height	1,550
Inner tube diameter	Ø 25 mm
Outer tube diameter	Ø 33,7 mm
Length of outer tube	1,300
Wall thickness inner tube	1,5 mm
Wall thickness outer tube	1,6 mm
Base leg profile	45 x 25 mm
Base weight	Unweighted
Base diameter	Ø 680 mm
Castors	Mono castors
Castor diameter	Ø 80 mm
Number of castors	5; 2 with brakes and elect. conductivity
Total load capacity (kg)	20
Load capacity per system (kg)	8
Load capacity per hook (kg)	5

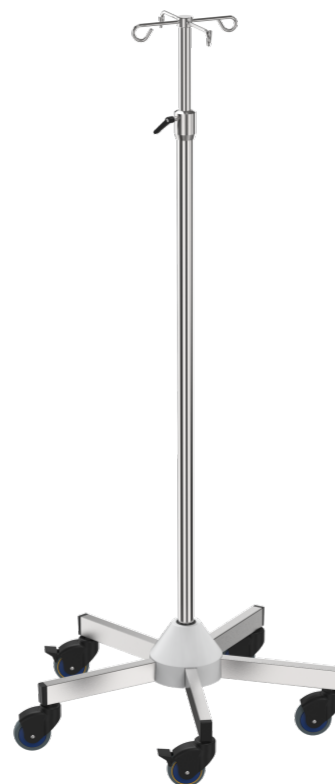

PACKAGING UNIT: UNIT

Width Box1	0,31 m
Height Box1	0,21 m
Length Box1	1,59 m
Weight Box1	10,7 kg



DIN ISO 15375
Bottle holders according to standards



Conductivity
for medical devices

 Made in
Germany



Area of application

The outer tube offers enough space to attach various devices at a user-friendly operating height



Technology

All plastic parts are lightfast

Stainless steel tubes according to DIN EN 10217-7

Material ultrasonic and eddy current tested (according to EN 10246-9/3)

The integrated pull-out limiter prevents the adjustable tubes from separating

Safety bottle cross according to DIN ISO 15375

great running characteristic through high value 80 mm Mono castors

a sealing cap prevents the IV-pole from hygienical sensitive liquids

Reinforced bottle holder allows hanging 5 liters of rinsing solutions



Safety

The base legs are sealed with plastic plugs (no risk of injury)

Low risk of pinching when retracting and extending the IV-pole thanks to the built-in safety distance

The Softdrop system dampens and controls the lowering of the inner tube

No risk of injury thanks to the rounded shape of the bottle hooks

The geometry of the hooks prevents the infusion bottle from falling out

